

HayTime Timer Gate Set with Two Fence Ropes

Attaching the Intermediate Line Between Two Gate Reels




1. To create a double-rope timer gate, you will need two reels and an connector rope.



2. Start attaching the connector rope by pulling the reel handle outward to expose the rope from the reel. You can prevent the rope from retracting by holding it in place, for example, with your foot.



3. Separate the metal hook of the handle from the plastic handle by pulling them in opposite directions. When pulling, it helps to wiggle the metal handle slightly to make it easier to detach.

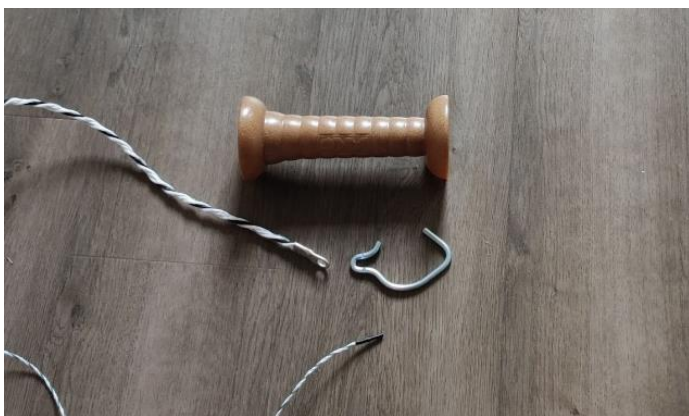

4. Remove the metal hook from the the rope and pull the rope out of the plastic handle. All parts should now be separated.

HayTime Timer Gate Set with Two Fence Ropes

Attaching the Intermediate Line Between Two Gate Rels



5. Thread the connector rope through the metal loop of the rope and pull out a sufficient length of the connector rope (you can adjust the length of the connector rope later).




6. Insert the rope-connector rope combination back into the plastic handle.



7. Push the rope-connector rope combination completely through the handle. Note that the combination should exit from the end of the plastic handle that resembles a cross.



8. Insert the metal hook back through the same metal loop of the rope where the connector rope was threaded.

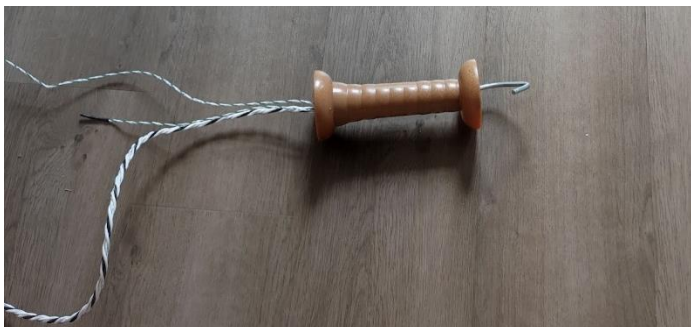

9. Reattach the metal hook to the handle by pulling the rope while holding the plastic part of the handle in place. Note that the metal loop of the rope goes through the narrower part of the cross on the plastic handle, and the metal fastener goes through the wider part.

HayTime Timer Gate Set with Two Fence Ropes


Attaching the Intermediate Line Between Two Gate Reels




10. The first handle is now ready. Repeat all the previous steps for the second handle. This way, you will connect the handles to each other using the connector rope (attach the handle of the second reel to the free end of the connector rope).



11. Now you have two handles connected to each other by a connector rope.

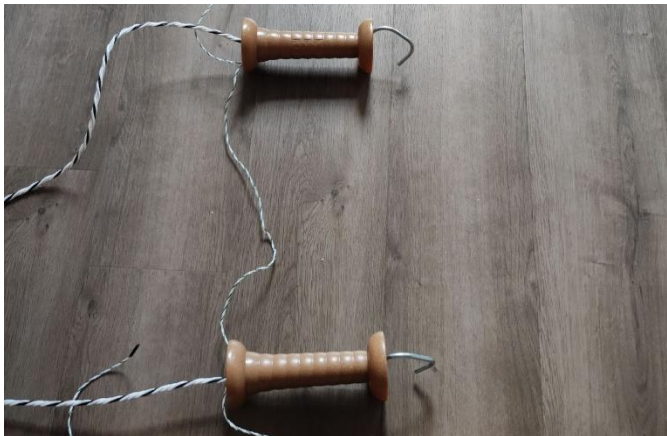

12. Check that the connector rope is straight. At this point, you can adjust the length of the connector rope by pulling it to the correct length. After that, we recommend tying knots at the points where the connector rope meets the handles to ensure that the connector rope remains at the desired length at all times. You can tie the knot, for example, around the rope of the reel.

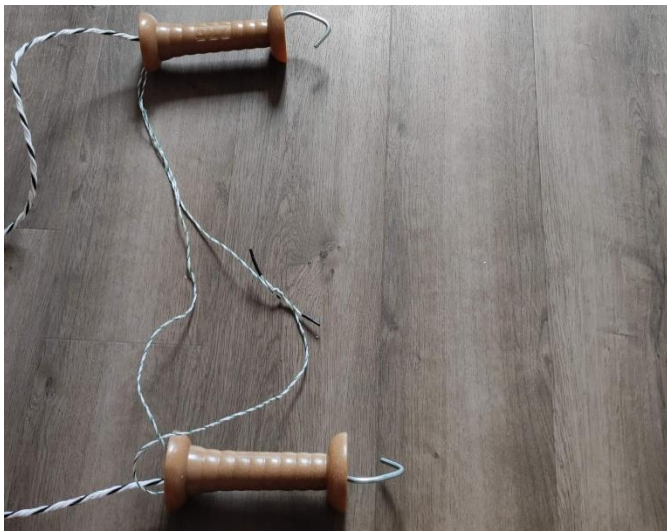

13. If you wish, you can either tie the opposite ends of the connector rope together, secure them with rope connectors purchased separately, or cut them off entirely if both ends of the connector rope are well tied around the rope.